

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 36 TOWNSHIP 15 RANGE 3

DATE: 11-11-05

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: HARRISON

METHOD OF ESTABLISHMENT: County:


IN. S.P.C. E ZONE, NAD '83

Name: 15033602

N: 495198.5480(m)

E: 58645.4780(m)

NOTE: Brass plug was fd to be
0.53'E & 0.13'N of stone fd.

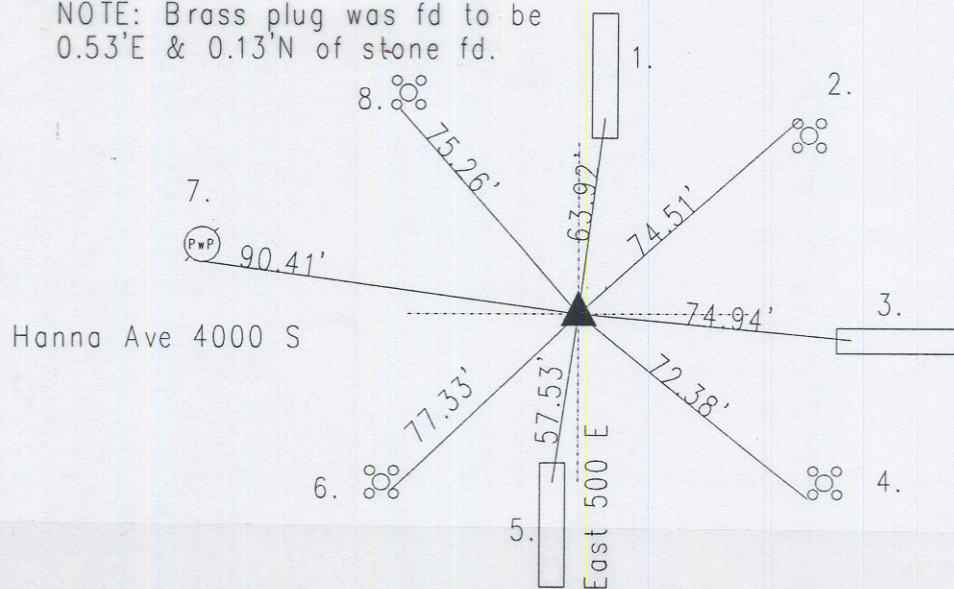

15033602 N Q

CORNER HISTORY: Corner originally set as a post in 1820 by Wm. B. Laughlin with witness: 6" hornbean S 10 E 2 links; 20" ash N 18 W 8 links per Marion County Atlas pg. 6. Survey by O.W. Voorhis dated 3-21&22-1861 called found one witness and took a new witness on 20" white oak N 73 E 48 links per Perry Township Legal Survey Book pg. 38. Survey dated 6-9-1942 called found brass pin flush per Perry Township legal Survey Book. Reference dated 9-26-1975 by Wilcoxon called PK nail over brass plug. Reference dated 12-29-86 by Gries called the same. Reference dated 10-1-95 by Wilcoxon called railroad spike set over brass plug. Reference dated 5-4-00 by Kiste called railroad spike found over brass plug. (Note: brass plug was found to be 0.53'E & 0.13'N of stone found.) Reference dated 11-9-05 by Wilcoxon called found brass plug 4" down, found pink granite stone 19" down, set Harrison on top of stone.

REF.	DISTANCE	DESCRIPTION
1.	63.92'	Cut 'x' in concrete median
2.	74.51'	Cut 'x' NW bolt ao aluminum pole base
3.	74.94'	Cut 'x' concrete median
4.	72.38'	Cut 'x' SW bolt of aluminum pole base
5.	57.53'	Cut 'x' in concrete median
6.	77.33'	Cut 'x' SF bolt of aluminum pole base
7.	90.41'	PK nail S PwP#33-666 8"up
8.	75.26'	Cut 'x' SW bolt of aluminum pole base